

TIRE CHANGER • TILT-BACK

BD823G

Automatic Table-Top Tire Changer

Flat tire demounting head

Powers 0.75 / 1.1 kW

Outside clamping range 10-22'' (GB) / 10-26'' (GD)

Inside clamping range 12-25'' (GB) / 12-28'' (GD)

Max tire width 350 mm



What sets the BD823GB apart

1

Flat tire demounting head

Special material demounting head with thicker hexagonal shaft is suitable for flat tire demounting.

2

High-performance integrated motor

Real-time load adjustment to improve energy efficiency and reduce energy consumption.

3

Ergonomic design

More convenient to demount flat, wide-body and super-hard blast tires.

4

Tilt-back design

Tilt-back working system.

5

Reinforced auxiliary arm

Smoother running, stronger structure; improves working efficiency.

6

Large Ø200 cylinder

2500–3000 kgf pressure output for demounting needs.


7

Manganese steel disk

Hardness, wear resistance and impact resistance for long time operation.

BD823GB specifications

Outside clamping range	10-22'' (GB) / 10-26'' (GD)	Voltage	110V / 220V / 380V
Inside clamping range	12-25'' (GB) / 12-28'' (GD)	Powers	0.75 / 1.1 kW
Max tire width	350 mm	Net/Gross weight	243 / 268 kg
Max tire diameter	1080 mm	Packing size	1150 × 800 × 1000 mm
Working air pressure	8-10 bar	Max QTY in container	30 pcs (20'') & 60 pcs (40'')
Operation speed	6 rpm		

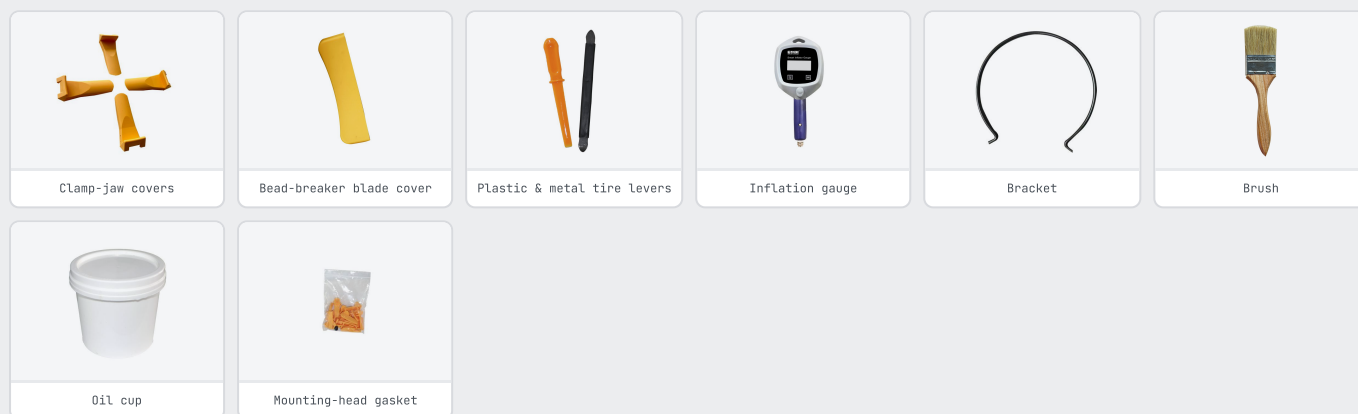

1998

FOUNDED · HK-OWNED

60+

EXPORT COUNTRIES

CE-ISO

9001:2015 CERTIFIED

OEM

ODM AVAILABLE

Request a quotation for the BD823GB

carson@coseng.com.cn · +86 137 2785 7065 · No. 6 Shuanglin East Road, Jinwan District, Zhuhai, China

