

TIRE CHANGER • TILT-BACK

BD825P

Automatic & Semi-Automatic Table-Top Tire Changer

Newly developed patented auxiliary arm

Rim Width 350 mm

Max. Wheel Diameter 1080 mm

Powers 0.75 / 1.1 kW

Operation Speed 6 rpm



What sets the BD825PRO apart

01

Reinforced auxiliary arm

Smoother running, stronger structure; improves working efficiency.

02

Large Ø200 cylinder

2500–3000 kgf pressure output for heavy-duty demounting needs.

03


Manganese steel disk

Hardness/wear/impact resistance for long time operation.



BD825PRO specifications

Outside Clamping Range	10-26''	Work Pressure	8-10 bar
Inside Clamping Range	12-28''	Voltages	110V / 220V / 380V
Max. Wheel Diameter	1080 mm	N./G. Weight	335 / 375 kg
Operation Speed	6 rpm	Packing DIM	1200 × 920 × 1900 mm
Powers	0.75 / 1.1 kW	Machine-Space DIM	1800 × 1800 × 2200 mm
Noise	<70 dB	Max QTY In Container	8 pcs (20'') & 16 pcs (40'')
Rim Width	350 mm		

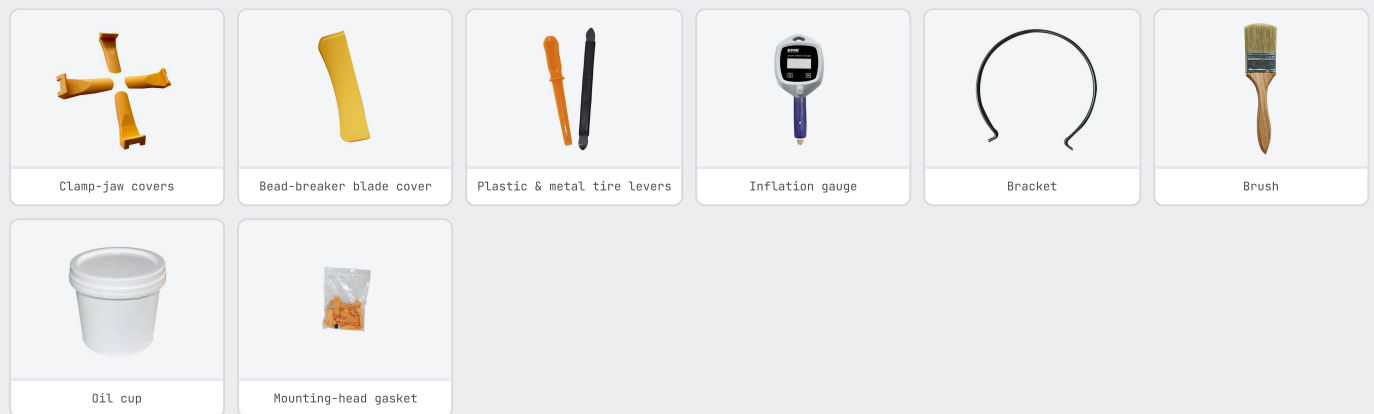

1998

FOUNDED · HK-OWNED

60+

EXPORT COUNTRIES

CE-ISO

9001:2015 CERTIFIED

OEM

ODM AVAILABLE

Request a quotation for the BD825PRO

carson@coseng.com.cn · +86 137 2785 7065 · No. 6 Shuanglin East Road, Jinwan District, Zhuhai, China

