

TIRE CHANGER • TILT-BACK

C233GB+NAAR

Tilt-Back Tire Changer with Assist Arm

2000-2500kgf aluminum alloy tire press cylinder

Applicable outer clamping 10"-21"


Applicable inside clamping 12"-24"

Max. wheel width 315mm

Max. wheel diameter 960mm



What sets the C233GB+NAAR apart

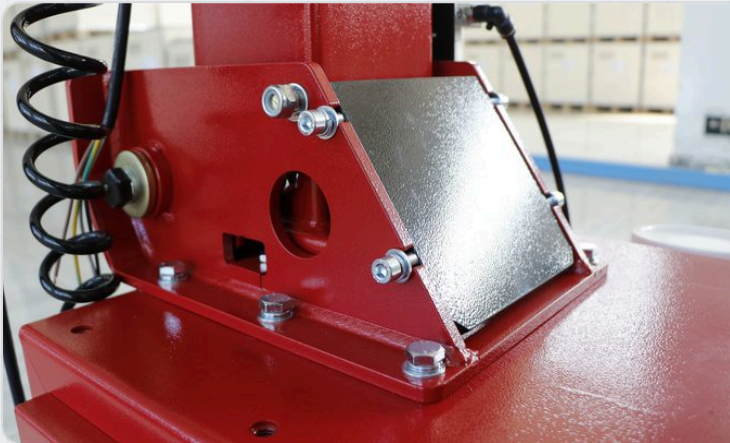


TiltBack design.

— COSENG · C233GB+NAAR

2000-2500kgf aluminum alloy tire press cylinder.

— COSENG · C233GB+NAAR

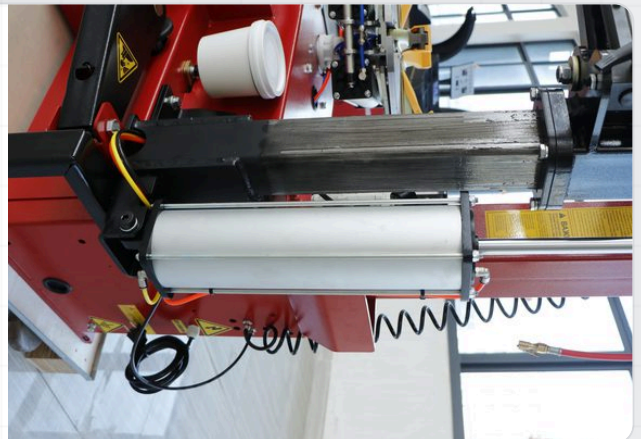

— MORE FEATURES

3

New hexagonal press rod sheath adjusts for misalignment.

5


Hexagonal bar adopts pneumatic locking, easy to operate.

4


High Precision Large Turntable serve up to 24 inch rim.

Components & build detail

Key components and assemblies of the C233GB+NAAR.

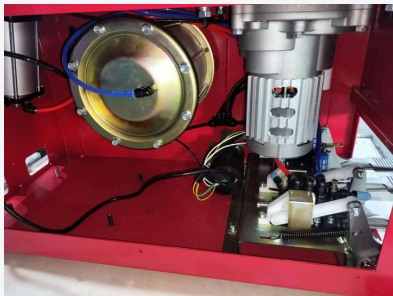

Integrated motor

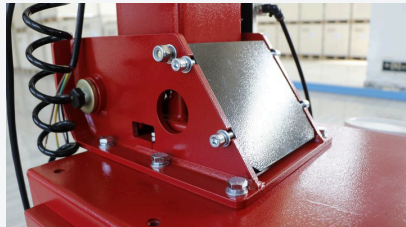

Tilt-back base



Bead-breaker blade



Bead-breaker arm



Plastic front cover




Turntable



Swing arm




Air lubricator

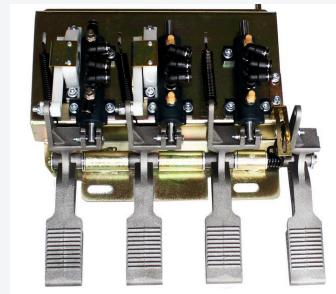

Foot pedals

C233GB+NAAR specifications

Applicable outer clamping	10" - 21"	Tire-pressed shovel force	2000-2500kgf
Applicable inside clamping	12" - 24"	Optional volt	110V/220V
Max. wheel width	315mm	N./G. Weight	228/253kg, 78/91kg(NAAR)
Max. wheel diameter	960mm	Packing DIM	9707701000mm, 1150520300mm(NAAR)
Working air pressure	8-10bar		

					
20-inch tire lever	Hex-rod cap	Clamp-jaw covers	Press-rod cap	Bead-breaker blade cover	Inflation gauge
					
Tire-lever cover	Bracket	Brush	Oil cup	Mounting-head gasket	

1998 FOUNDED · HK-OWNED	60+ EXPORT COUNTRIES	CE-ISO 9001:2015 CERTIFIED	OEM ODM AVAILABLE
---	--	--	---

Request a quotation for the C233GB+NAAR

carson@coseng.com.cn

+86 137 2785 7065

No. 6 Shuanglin East Road, Jinwan District, Zhuhai, China

