

TIRE CHANGER • TILT-BACK

C233GCIT+NAA

Tilt-Back Tire Changer with Assist Arm

New hexagonal press rod sheath adjusts for misalignment

Applicable outer clamping **11"-24"**

Applicable inside clamping **13"-26"**

Max. wheel width **350mm**


Max. wheel diameter **1080mm**

C233GCIT+NAAR

PRODUCT IMAGE COMING SOON



What sets the C233GCIT+NAAR apart

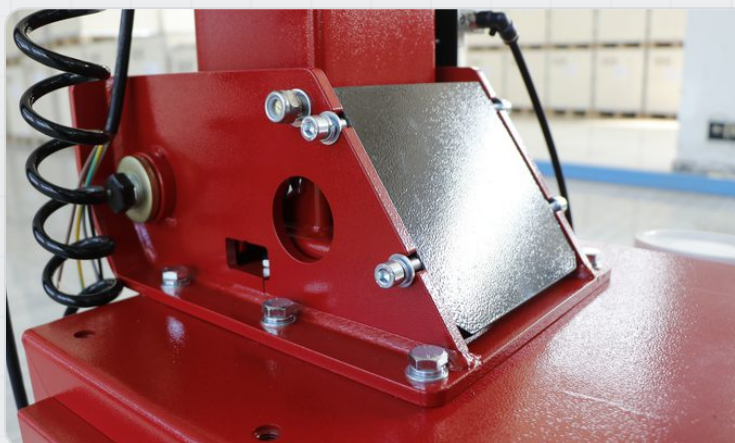

Tilt


Back design.

— COSENG · C233GCIT+NAAR

2000

2500kgf aluminum alloy tire press cylinder.

— COSENG · C233GCIT+NAAR

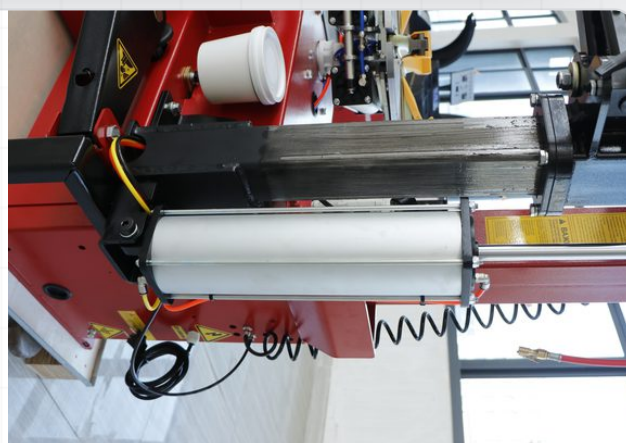

— MORE FEATURES

3

New hexagonal press rod sheath adjusts for misalignment.

4

Ergonomic design, more convenient to dismount flat, wide

body and super hard anti-explosion tires.

5


High Precision Large Turntable serve up to 26 inch rim.

6


Hexagonal bar adopts pneumatic locking, easy to operate.

Components & build detail

Key components and assemblies of the C233GCIT+NAAR.

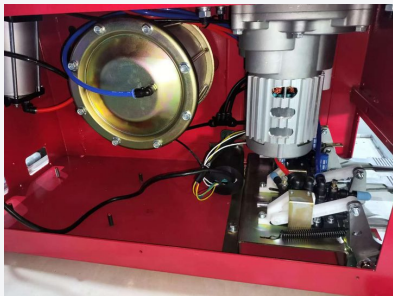

Integrated motor

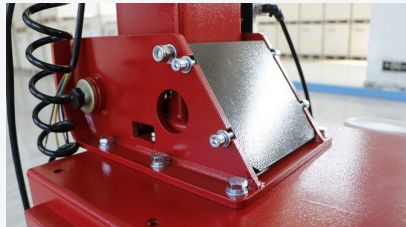

Tilt-back base



Bead-breaker blade



Bead-breaker arm



Plastic front cover




Turntable



Swing arm




Air lubricator

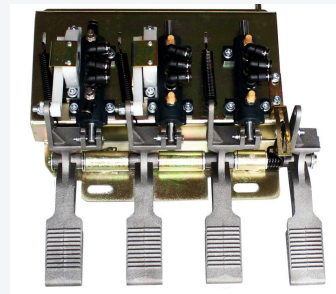

Foot pedals

C233GCIT+NAAR specifications

Applicable outer clamping	11"-24"	Tire-pressed shovel force	2000-2500kgf
Applicable inside clamping	13"-26"	Optional volt	110V/220V
Max. wheel width	350mm	Net Weight	360kg
Max. wheel diameter	1080mm	Packing DIM	11507701020mm, 1150520300mm(NAAR)
Working air pressure	8-10bar		

 20-inch tire lever	 Hex-rod cap	 Clamp-jaw covers	 Press-rod cap	 Bead-breaker blade cover	 Inflation gauge
 Tire-lever cover	 Bracket	 Brush	 Oil cup	 Mounting-head gasket	

1998 FOUNDED · HK-OWNED	60+ EXPORT COUNTRIES	CE-ISO 9001:2015 CERTIFIED	OEM ODM AVAILABLE
-----------------------------------	--------------------------------	--------------------------------------	-----------------------------

Request a quotation for the C233GCIT+NAAR
carson@coseng.com.cn · +86 137 2785 7065 · No. 6 Shuanglin East Road, Jinwan District, Zhuhai, China

