

TIRE SERVICE EQUIPMENT

TS830

Pneumatic Tire Spreader

Vertical pneumatic tire spreader for repairs

Applicable Clamping 14-20"

Max. Wheel Width 80-350mm

Air Pressure 6-10bar

Net Weight 28kg



What sets the TS830 apart

01


Pneumatic tire spreader

Vertical pneumatic tire spreader is designed to repair tires.

02

Compact design

This design allows user to have small space to repair tires.

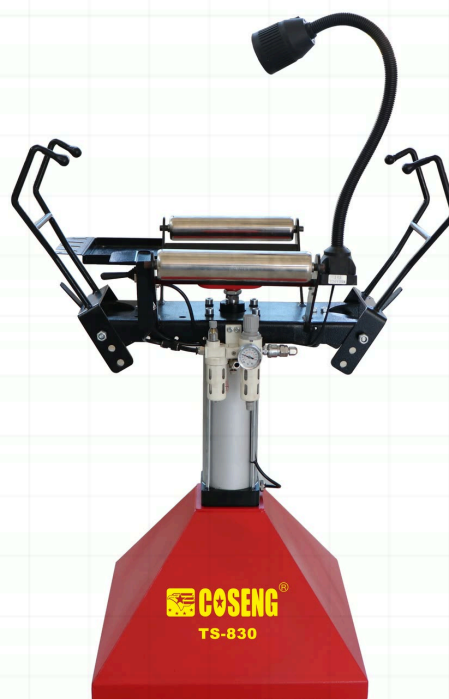

TS830 specifications

Applicable Clamping	14-20"	Net Weight	28kg
Max. Wheel Width	80-350mm	Packing DIM	550×530×850mm
Air Pressure	6-10bar	Noise	<70dB

1998

FOUNDED · HK-OWNED

60+

EXPORT COUNTRIES

CE-ISO

9001:2015 CERTIFIED

OEM

ODM AVAILABLE

Request a quotation for the TS830

carson@coseng.com.cn · +86 137 2785 7065 · No. 6 Shuanglin East Road, Jinwan District, Zhuhai, China

